


→ NUL07-7

Crawler type Articulated boom lift

FEATURES

- ✓ Low emission
- ✓ Allowable tilt 5°
- ✓ Zero / Short tail
- ✓ Operation restriction (slope)




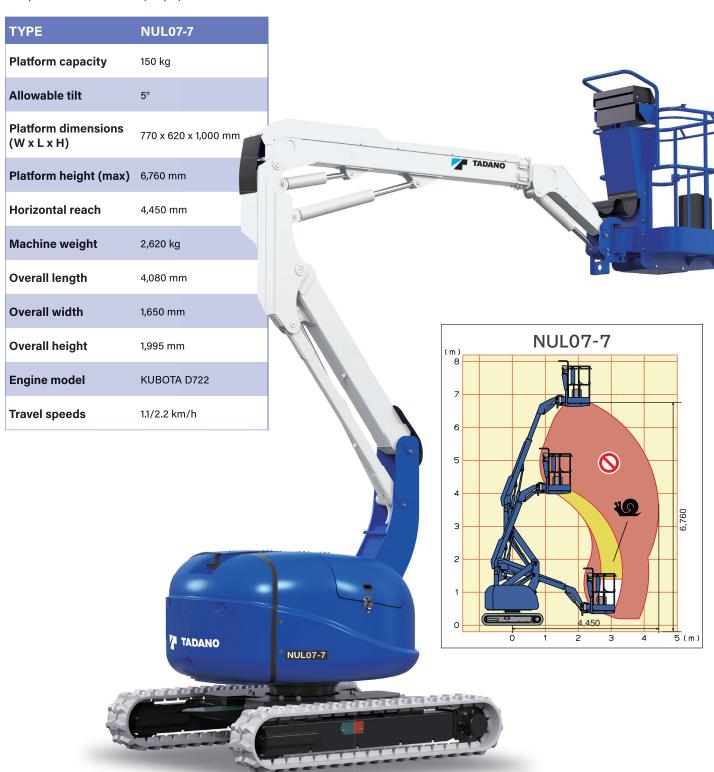



Lifting the machine

- ⚠ Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Ensure the boom is in stowed position before lifting.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

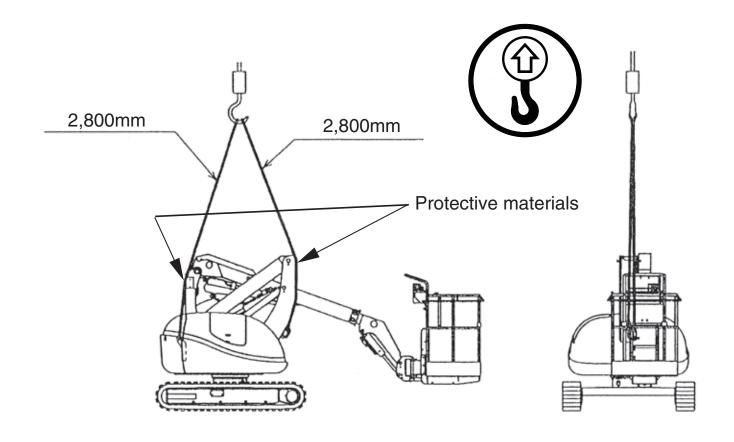

Tadano Utilities Ltd.

homepage address www.tadano-utilities.com