→ NUS10-7/NUS10N-7

Crawler type Telescopic boom lift

FEATURES

- ✓ Low emission
- ✓ Allowable tilt 5°
- ✓ Zero / Short tail
- ✓ Overload sensing
- √ 6 ft platform (option)
- ✓ Travel stop regulation (NUS10-7)

✓ Travel stop regulation✓ Total range traveling			
ТҮРЕ	NUS10-7/NUS10N-7		
Platform capacity	200 kg		P CO
Allowable tilt	5°		
Platform dimensions (W x L x H)	1,130 x 730 x 1,000 mm	A A A A A A A A A A A A A A A A A A A	
Platform height (max)	9,810 mm		(m) NUS10-7
Horizontal reach	7,700 mm		11 10
Machine weight (w/pad)	5,970 (5,970) kg		9 8 7 6
Overall length	6,140 mm		5 4 10.18'6
Overall width	2,050 mm		3 2
Overall height	2,290 mm		7,700
Engine model	KUBOTA D1105		(m)
Travel speeds	0.7/1.3/2.3 km/h	NUS10N-7	(m) NUS10N-7

Specification are subject to change without prior notice for improvement.

TADANO

Improved Safety Features


7 series

NUS10-7 / NUS10N-7



Lifting the machine

- Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Ensure the boom is in stowed position before lifting.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

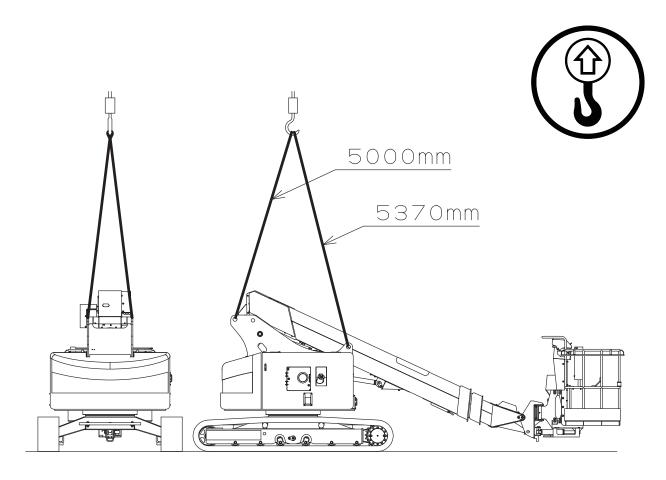

Tadano Utilities Ltd.

homepage address www.tadano-utilities.com