



→ AA-9PCHD (NUZ09A-6)

Extra-wide platform
Crawler type / Articulated boom lift

FEATURES


- ✓ Low emission
- ✓ Overload sensing
- ✓ Max platform capacity 600kg

TYPE	AA-9PCHD
Platform capacity	600 kg
Allowable tilt	3°
Platform dimensions (W x L x H)	2,050 x 3,150 x 900 mm
Platform height (max)	9,280 mm
Horizontal reach	4,780 mm
Machine weight (w/pad)	7,430 (7,670) kg
Overall length	3,770 mm
Overall width	2,250 mm
Overall height	2,670 mm
Engine model	KUBOTA D1305
Travel speeds	0.8/1.5/2.7 km/h

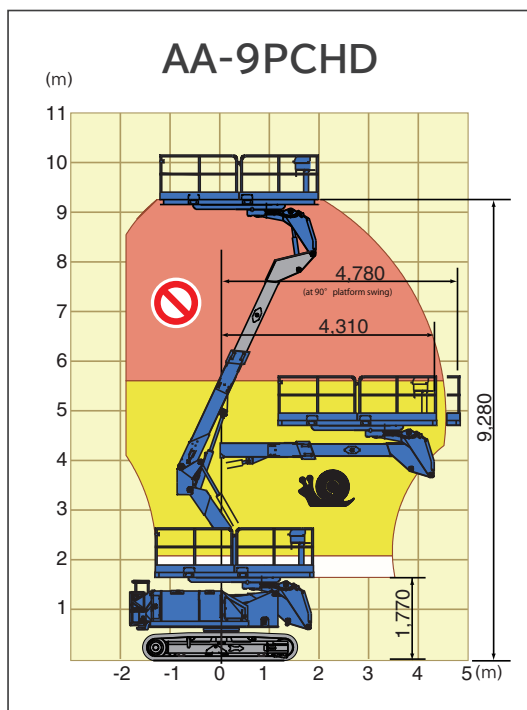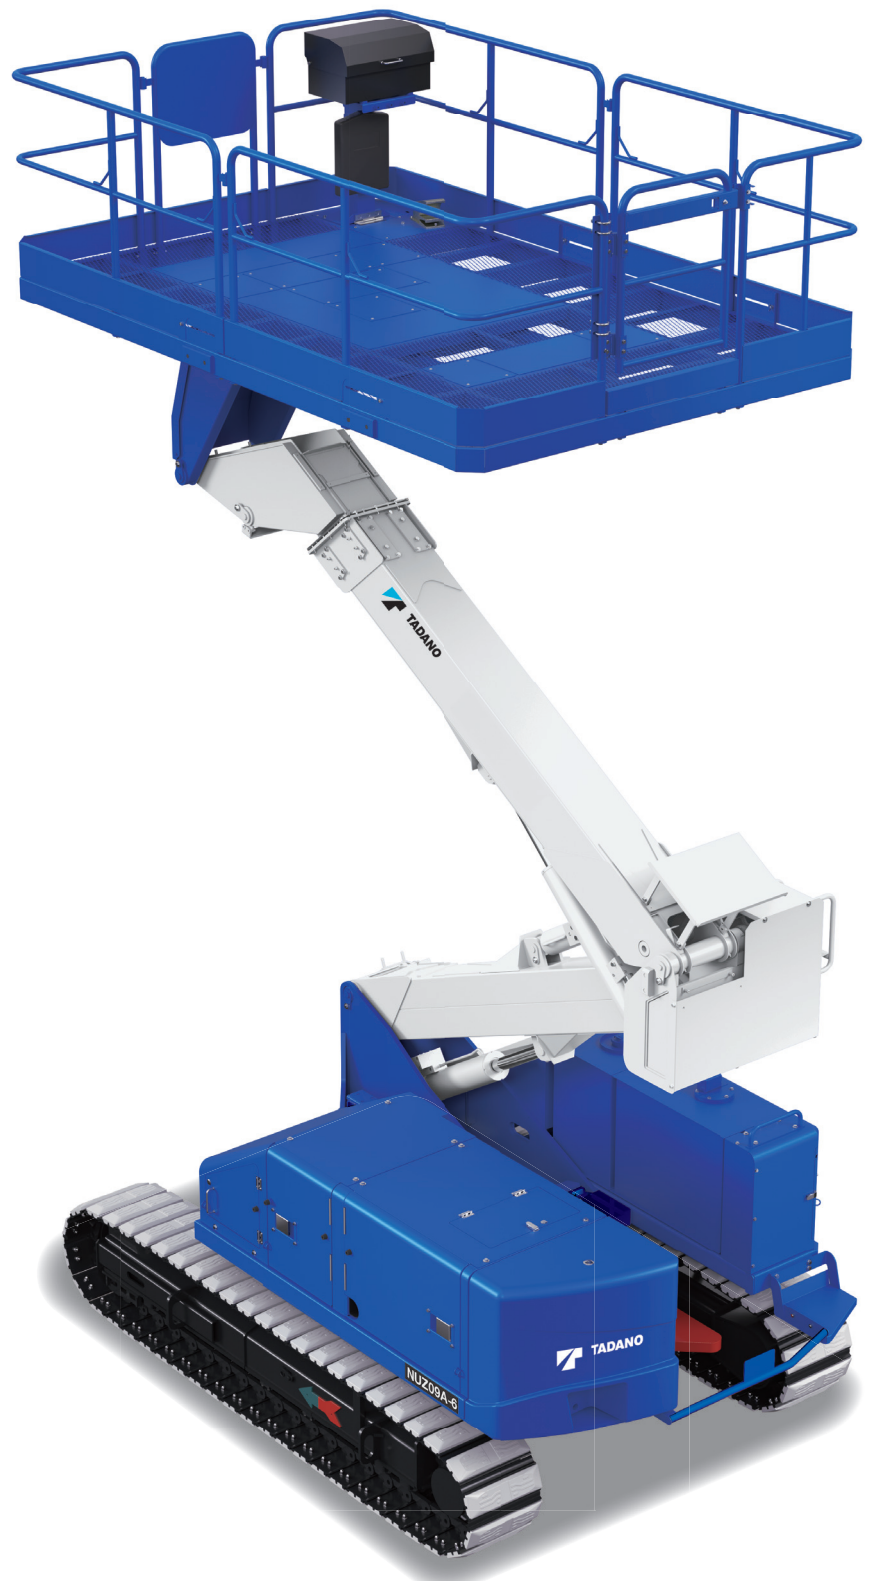

Lifting the machine

- ⚠ Use only qualified rigging to hoist the machine.
- ⚠ Be sure that lifting devices and crane are sufficient to withstand the machine weight.
- Raise Lift boom until the rigging not touched and turntable locked with slewing lock-pin.
- Determine the center of gravity of the machine as shown below.
- Attach the rigging to designated lifting rings on the machine.
- Insert protective materials where rigging may interfere with the machine.

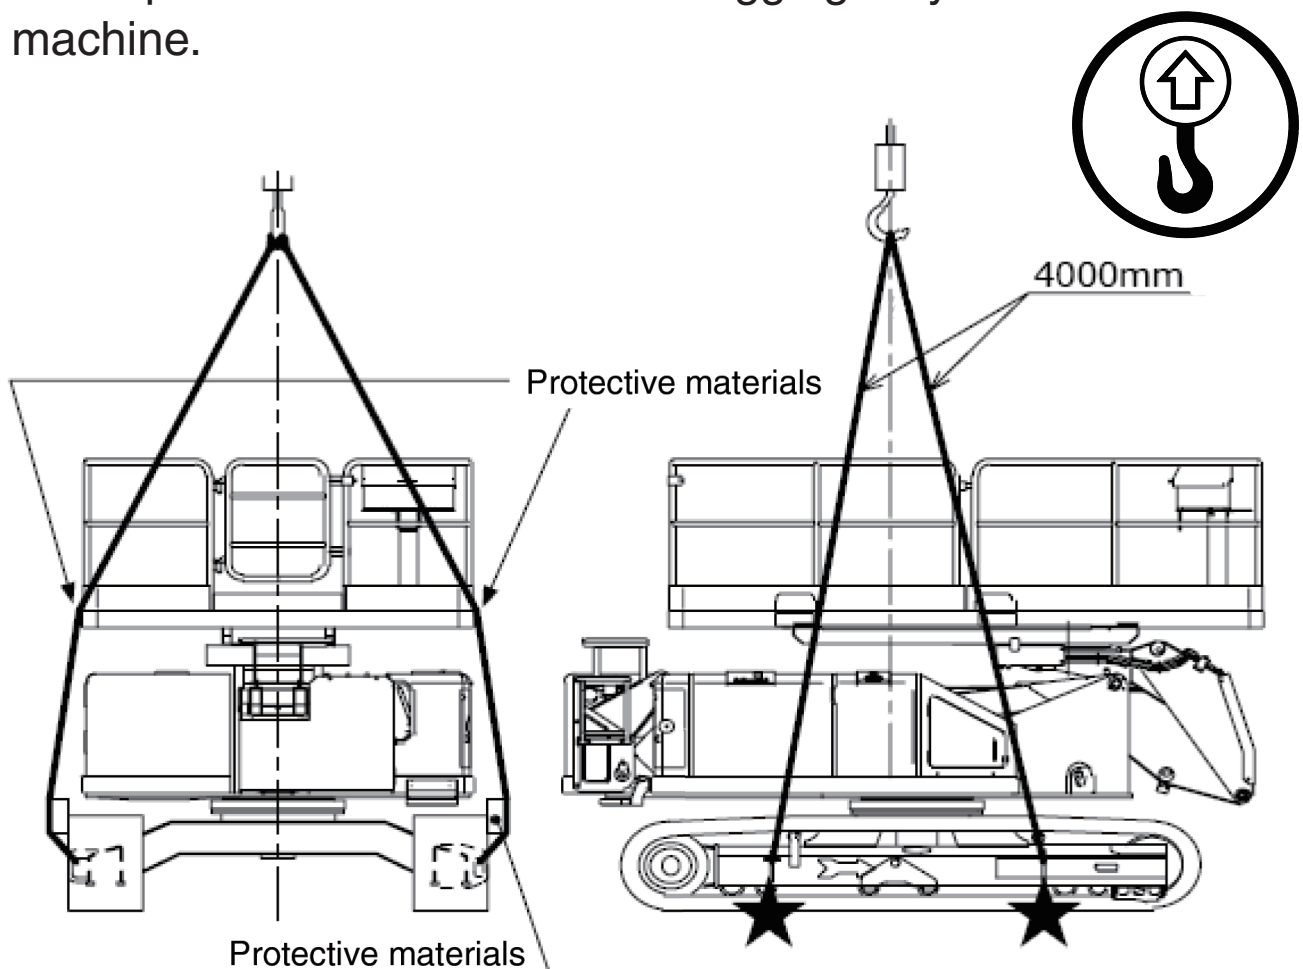

Tadano Ltd.

Kanda Square 18th Floor, 2-2-1 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-0054, Japan

Phone: +81-3-6811-7309

info@tadano.com

www.tadano.com